


DATE MAY 20, 1949 PAGE 7000
STANDARDIZING
NOTICE
13-1-IR
RCA

RADIO CORPORATION OF AMERICA
RCA VICTOR DIVISION
TUBE DEPT. STANTON, N. J.
HARRISON, N. J.



SUBJECT

PROPOSED FOR CATHODE RAY.

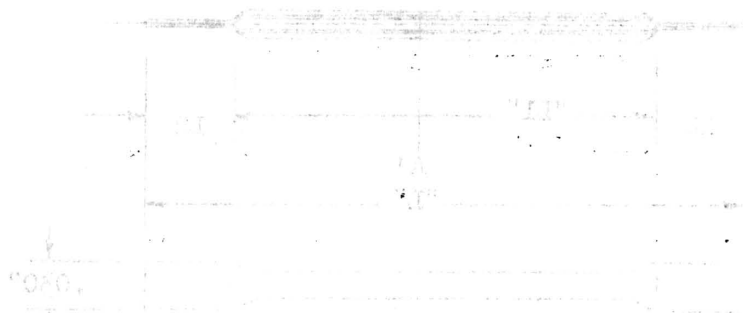

Form on "C.R.T." dia. mandrel
Location at A-A'
Scale: 1/2"

Thickness inches	Length inches	Width inches	Channel Length inches	Retention No.
.0005	20	7	12.5	1000
.0005	18	4	11.5	1000
.002	18	5	10.5	1000
.002	18.5	5	12.5	1000

STANDARD LUBRICANTS

Parts or assemblies manufactured by a vendor shall use no lubricants other than the **Standard Lubricants** listed below:

1. Butyl Carbitol Acetate (Carbide & Carbon Chemical Co.)
2. Semi-Fluid Vastolein-T (G. Whitfield Richards Co.)
3. No. 6603-2 Extreme Pressure Drawing Compound (Standard Oil Co.)
4. Varsol (Standard Oil Co.)
5. Sunoco Spirits (Sun Oil Co.)
6. N-A-L Oil (G. Whitfield Richards Co.)
7. 600-W Oil
8. Cadet W Oil (Sinclair Refining Co.)
9. Castor Oil
10. Mineral Machine Oil (SAE 30)
11. Fiske No. S-130 (Fiske Bro's. Refining Co.)
12. Banner 18/37 (Clarkson & Ford Co.)
13. No. 24 Slushing Oil (Standard Oil Co. of Ohio)

Any deviations must first have R. C. A. approval.

For parts made in R. C. A. plants refer to Standardizing Notice 34-29-1 for lubrication specifications.