


RCA RADIOTRON

UV-211

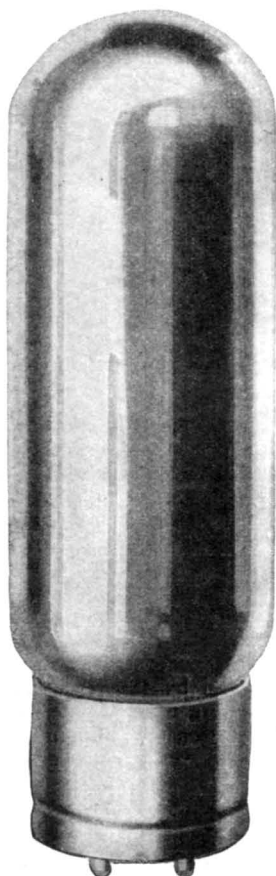

Firm net price
\$30.00

An excellent general purpose
transmitting tube

THE well deserved popularity of the type UV-211 Radiotron among the Amateur Fraternity is due to its variety of applications. This versatile tube can be used as a modulator, oscillator, audio frequency and radio frequency power amplifier.

When used as an oscillator or class "C" amplifier at recommended frequencies, type UV-211 will deliver an output of over 75 watts.

Nominal Rating

Filament voltage 10 volts
Filament current 3.25 amperes

As AF Amplifier Class "A"

Plate voltage 1000 volts
Bias -55 volts
Plate current 72 milliamperes
Output (5% second harmonic) . 10 watts

Oscillator or Class "C" Amplifier

Plate voltage 1000 volts
Grid Bias -200 volts
Plate current 175 milliamperes
Plate Dissipation max. 100 watts
Power output 75 watts

ENGINEERING PRODUCTS DIVISION
RCA Victor Company, Inc., Camden, New Jersey
A Radio Corporation of America Subsidiary

155 East 24th St.
New York, N. Y.

100 W. Monroe St.
Chicago, Ill.

Santa Fe Bldg.
Dallas, Tex.

235 Montgomery St.
San Francisco, Cal.